



BROWN & GAMMONS LTD

Tel: 01462 490049 Fax: 01462 491940

www.ukmgparts.com

sales@ukmgparts.com

MG TF HOOD MODIFICATION STRAPS, DJE000010Z FITTING INSTRUCTIONS

1. Fully lower both windows.
2. With the hood raised, fit strap to first frame rail ensuring that the strap buckle with fastening pin faces the front of the vehicle. The strap must be positioned between the existing hood strap and the hood side levers (Fig. 1).

Attaching straps to Rail: Remove the pin from its stitched pocket and feed the buckle end of the strap over the rail to form a loop. Feed the empty pin pocket through the buckle and re-insert the pin into the pocket, the strap will now be secured to the rail. When fitted, the strap buckle must face the inside of the vehicle (not facing the hood material).

3. Repeat procedure for the second strap.

To attach the opposite end of each strap, i.e. to the second rail, collapse the hood slightly to release tension (ensure that the rear screen folds evenly without creasing).

Attaching the strap to the second rail will be more difficult due to the remaining strap tension. To assist with fitting, feed the loop partially through the buckle and begin to register pin (Fig 2). Continue feeding remaining loop material through buckle holding the empty loop section in one hand while pushing pin fully into loop pocket with other. Fig 3 shows both ends of strap fitted with hood partially lowered.

4. With straps fully secured and spaced, fully raise and clamp the hood and fully raise the windows. Ensure that straps are fitted evenly and that the pins are fitted fully into their pockets (Fig 4).

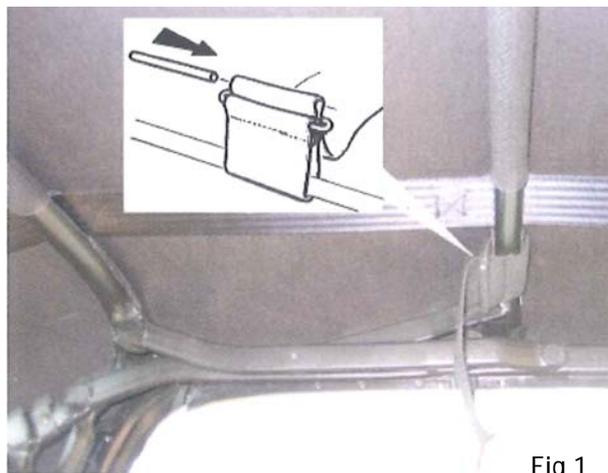


Fig 1



Fig 2



Fig 4



Fig 3